



- ▶ Analog Leak Detection System
- ▶ Leak Detection of Hydrocarbons
- ▶ Three LED Indicators
- ▶ Two Output Relays

## Description

The FG-A-OD alarm unit is designed to be used with FG-OD hydrocarbon range of hydrocarbon sense cables and probes, to provide rapid detection of non-conductive hydrocarbon liquids and solvent.

### System Responses:

- Leak Detection: Triggers an audible alarm, activates the red LED, and activates the leak relay.
- Cable Break: Triggers an audible alarm, activates the yellow LED, and activates the cable break relay.

### Alarm Control:


- The "SOUND OFF" button on the front panel allows manual muting of the audible alarm. However, the LED and relay remain activated until the fault is resolved. Once corrected, the system automatically returns to normal status.

## Key Advantages

- Zone Control: The FG-A-OD unit can control one length of sense cable up to 20 m.
- Fault Detection: The system detects cable break faults to ensure reliable monitoring.
- Clear Alerts: Visual and audible indicators differentiate between leak and cable break faults.
- Easy Installation: Easily accessible terminals enable quick and hassle-free installation.
- Reliable & Simple: The FG-A-OD unit is accurate and user-friendly, making it ideal for small applications where precise leak location is not required.

## Panel Description

- 1: The leak signal (red LED) indicates that the system has detected a liquid leak.
- 2: The continuity signal (yellow LED) indicates that the system has detected a circuit interruption.
- 3: The power supply signal (green LED) indicates that the system is in normal operation.
- 4: The button is used to stop the audible alarm.

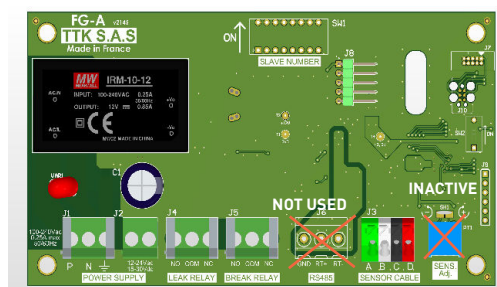

FG-A-OD Connector Description

# Technical Data

<b>Compatibility</b>	Sense cables: FG-OD range of cables and probes
<b>Dimensions &amp; Weight</b>	172 mm W × 86.6 mm H × 55 mm D 0.6 kg
<b>Sensor Capacity</b>	1 length of sense cable
<b>Location Accuracy</b>	Leak detection without location
<b>Operating Languages</b>	English
<b>Supply Voltage</b>	12-24VAC, 15-30VDC, 100-240VAC, 50/60Hz
<b>Current</b>	0.02 A (120 V), 0.01 A (230 V)
<b>Power Consumption</b>	2 VA Max
<b>Operating Temperature</b>	-15°C to +55°C
<b>Case Type</b>	ABS POLYAC 707 (a natural ABS), rated UL94 HB
<b>Screen Size</b>	No screen
<b>Format</b>	Wall mounted
<b>Ingress Protection</b>	IP40
<b>Serial Connection</b>	NA
<b>Numbers of Relays</b>	2 (1 leak relay + 1 break and power failure relay)
<b>Relay Types</b>	Volt free dry contact (NO, NC, COM)
<b>Power Failure Relay</b>	Activated on loss of supply voltage
<b>Type of Faults Available on the Configurable Relays</b>	Non-configurable
<b>Maximum Relay Switching Voltage</b>	125 VAC and 220 VDC
<b>Maximum Relay Switching Capacity</b>	60 W (30 V × 2A)

## Identification Codes

<b>FG-A-OD F</b>	Leak Detection Alarm Unit (Wall Mounted) 240VAC - Oil Detection
<b>Accessories:</b>	
<b>FG-CLOD</b>	Leader Cable 3.5 m
<b>FG-TMOD</b>	End Termination
<b>FG-NOD 'N'</b>	OD Bus 8771 Neutral Cable 'N' (1, 3, 7, 15, 30 m) with Connectors
<b>CF-OD50</b>	50 Hold-down Clips with Adhesive
<b>ES-OD</b>	40 Signal Tags

## Certifications



FG-OD sense cables which are certified by ATEX can be connected to the FG-A-OD alarm & location unit. All the connections in the FG-A alarm unit must be done with the power supply switched off. Read carefully the installation procedure for the FG-A-OD alarm unit.

This brochure has been carefully prepared to ensure technical accuracy but is only intended for promotional use. TTK cannot guarantee that the information contained herein contains no errors or omissions, and hence does not accept responsibility related to the use of its equipment. TTK maintain its obligations set forth in the Standard Terms and Conditions of Sale and will not, under any circumstances, assume liability for any incidental damages, indirect or consequential, arising from the sale, resale, use or misuse of this product. The purchaser(s) accept their responsibility as the sole judge(s) of the adaptability of the product for the intended use.

FG-NET, FG-SYS and TOPSurveillance are trademarks of TTK S.A.S. © TTK 2025

- **TTK UK Ltd.** / 3 Luke Street / London EC2A 4PX / United Kingdom / T : 0207 729 6002 / F : 0207 729 6003 / [www.ttkuk.com](http://www.ttkuk.com) / [sales@ttkuk.com](mailto:sales@ttkuk.com)
- **TTK Pte Ltd.** / #09-05, Shenton House, 3 Shenton Way / Singapore 068805 / Tel.+65-6220.2068 / Mob: +65.9271.6191 / Fax: +65-6220.2026 / [www.ttk.sg](http://www.ttk.sg) / [sales@ttk.sg](mailto:sales@ttk.sg)
- **TTK Asia Ltd.** / 2107-2108 Kai Tak Commercial Building / 317 Des Voeux Road Central / Hongkong / Tel.+852.2858.7128 / Fax.+852.2858.8428 / [www.ttkasia.com](http://www.ttkasia.com) / [info@ttkasia.com](mailto:info@ttkasia.com)
- **TTK Middle East FZCO** / Building 6EA, Office 510 PO Box 54925 / Dubai Airport Free Zone / UAE T: +971 4 70 17 553 / M: +971 50 259 66 29 / [www.ttkuk.com](http://www.ttkuk.com) / [cgallichef@ttk.fr](mailto:cgallichef@ttk.fr)
- **TTK Headquarters** / 19 rue du Général Foy / 75008 Paris / France / T : +33.1.56.76.90.10 / F : +33.1.55.90.62.15 / [www.ttk.fr](http://www.ttk.fr) / [ventes@ttk.fr](mailto:ventes@ttk.fr)